

## Technical data

### Offshore K12.450 - 2

With motor


### NU 911-2/101-o

Project name Borr Drilling Jack-up Fleet

Project ID Pump 'B'

Installation location

Date 2023-10-24

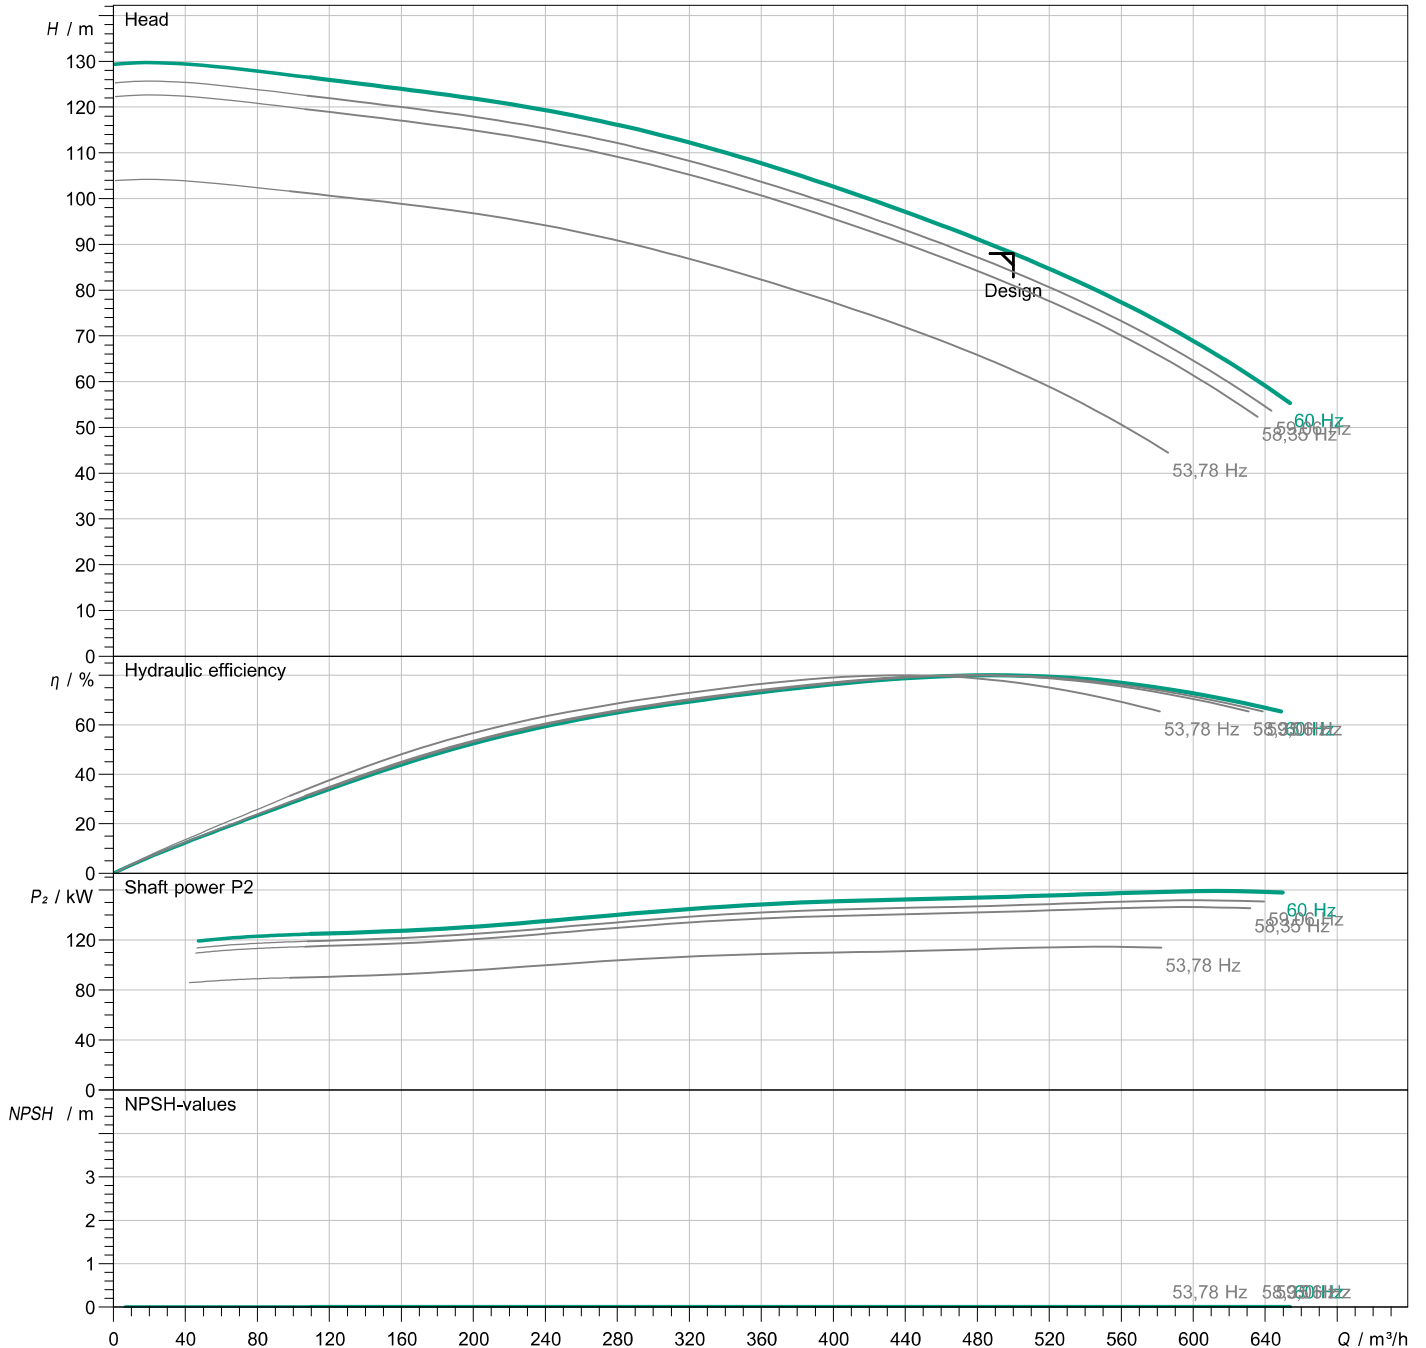

#### Pump

Stages	2
Impeller Ø	designed 188,1 mm
Nominal speed	3500 1/min
Frequency	60 Hz
Impeller type	

#### Motor

Rated power	161 kW
-------------	--------

Sel. explosion protection

Subject to change

#### Duty point data

Volume flow	500,00 m³/h
Head	88 m
Shaft power P <sub>2</sub>	P <sub>2</sub> 154,5 kW
Pump efficiency	79,96%
Power input P <sub>1</sub>	P <sub>1</sub> 173,7 kW
Required pump NPSH	0 m
Speed	3513 1/min