

The Cost Effective Approach to Quality Filtration

FTC introduces its new 740 PLATINUM Series absolute rated filter cartridge

This unique design, U.S. Patent No. 5824232, uses segregated flow channels and flow chambers to maximize the effective surface area of the pleated filter media within a 6.25 inch OD cartridge. Combining this design with the technique of pleating several different filter media together in a single pleat pack maximizes dirt holding capacity.


One 740 PLATINUM Series filter is designed to have the dirt holding capacity of 10 standard 2.5 inch OD pleated cartridges of similar length. Available in a wide variety of filter media, this cartridge can be constructed with metal end caps and core for high temperature applications.

With a recommended flow rate of 40 GPM, this FTC PLATINUM Series filter is the solution to achieving optimum performance while minimizing filtration costs.



FILTRATION COST EFFICIENCY

DIRT HOLDING CAPACITY

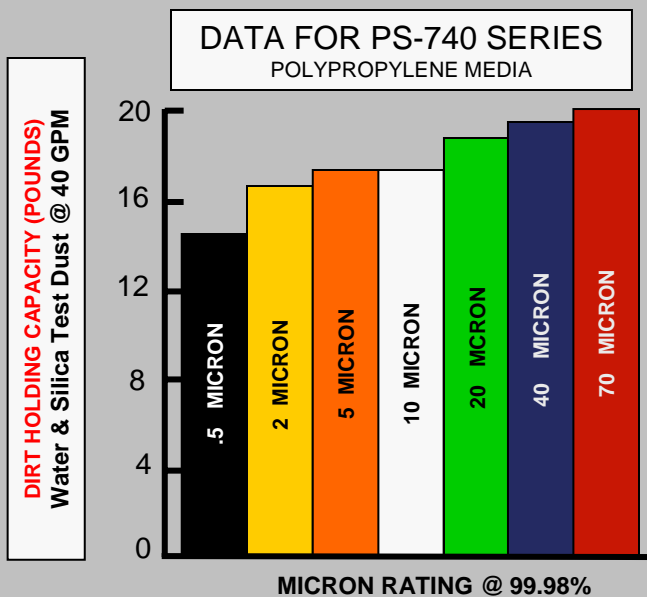

INCREASING FILTER LIFE

DOUBLING FILTER SURFACE AREA CAN INCREASE FILTER LIFE UP TO FOUR TIMES:

FILTER LIFE INCREASE =

$$\frac{Le}{Lo} = \left(\frac{Ae}{Ao} \right)^N$$

Le = Extended Filter Life
Lo = Original Filter Life
Ae = Expanded Filter Area
Ao = Original Filter Area
 $1 \leq N \leq 2$

FILTER EFFICIENCY


$$\text{Beta Ratio} = \frac{\text{Upstream Particle Count at Specified Size \& Larger}}{\text{Downstream Particle Count at Specified Size \& Larger}}$$

The Beta ratio (β) at a given particle size can be correlated to the filter efficiency at that particle size according to the following formula:

$$\text{Filter Efficiency (\%)} = [(\beta - 1) / \beta] \times 100\%$$


Beta Ratio (β)	Filter Efficiency (%)
100	99.00
1000	99.90
5000	99.98

Each filter element will have a different Beta Ratio for every specified particle size. The determination of a variety of Beta values for the same filter provides a filter efficiency profile commonly referred to as a Beta Curve.

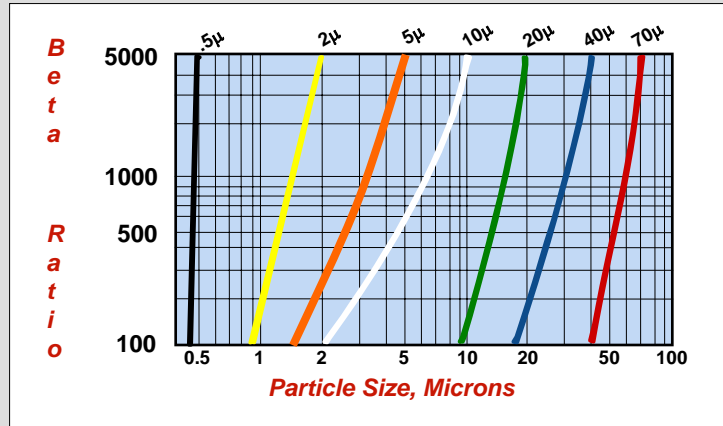

FTC BETA CURVES

CARTRIDGE CODING

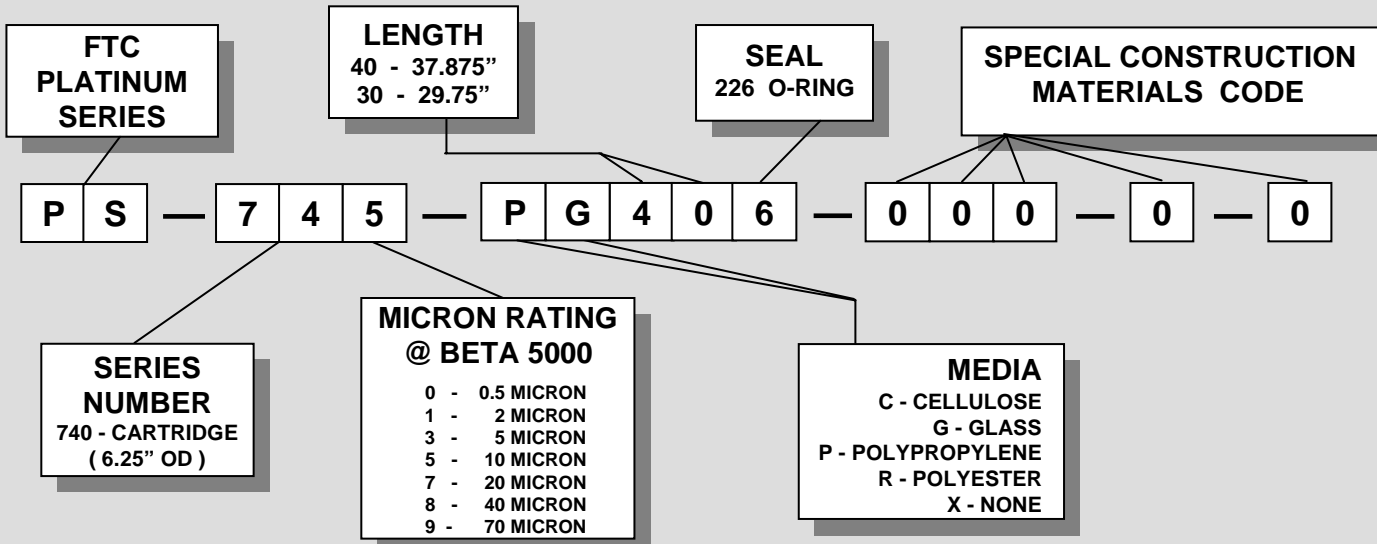

Notice: The information presented here is based on tests and data which FTC believes to be reliable, but their accuracy or completeness is not guaranteed. FTC MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FTC product is fit for a particular purpose or application is the responsibility of the user.



FORM PS-740 7/07

Filtration Technology Corporation

5175 Ashley Court
Houston, Texas 77041
(713) 849-0849 • 888-436-0849 • FAX (713) 849-0202
www.ftc-houston.com